



Toll Free: 87 PERMATEX  
(877-376-2839)

10 Columbus Blvd., Hartford,  
Connecticut 06106

6875 Parkland Boulevard, Solon  
Ohio 44139

## Technical Data Sheet

# Permatex® Decal & Adhesive Remover

AAM Revised 10/15

### PRODUCT DESCRIPTION

Permatex® Decal & Adhesive Remover is a solvent stripper specifically designed to quickly remove decals, stickers and adhesive from bumpers, windows and truck bodies.

### PRODUCT BENEFITS

- Eliminates time consuming scraping
- Safe on most hard surfaces
- Leaves no residue
- Safe for indoor and outdoor use


### TYPICAL APPLICATIONS

Removes decals, bumper stickers, adhesives, grease, tar, tree sap and bugs from:

- Auto bodies
- Bumpers
- Windows
- Windshields

### DIRECTIONS FOR USE

1. Provide adequate ventilation.
2. Shake can thoroughly before use. Test on an inconspicuous area before using.
3. Apply Decal & Adhesive Remover directly to bumper sticker or label.

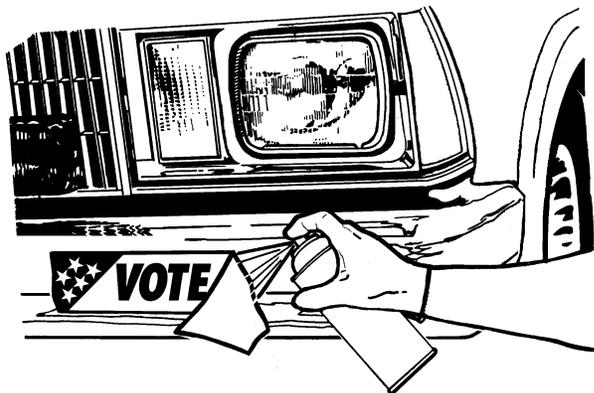

4. Allow 5 to 10 minutes for product to penetrate. Then lift the decal Permatex Safer Scraper.
5. For difficult applications, remove decal or sticker facestock and reapply.
6. Again allow to penetrate and repeat process.
7. Eliminate any remaining residue and wipe clean.

### For Cleanup

1. Clean hands with Permatex® brand hand cleaners.

### PROPERTIES OF MATERIAL

	Typical Value
Chemical Type	Petroleum and citrus solvents
Appearance	Clear liquid
Odor	Citrus
Flash Point	Aerosol, contents under pressure, consult MSDS
NFPA 704 Flammability Rating	4 (Highly flammable)

### GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

### ORDERING INFORMATION

Part Number	Container Size
80025	5 oz. aerosol can

### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.  
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.  
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-87PERMATEX)