



Toll Free: 87 PERMATEX
(877-376-2839)

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Rust Dissolver Gel

AAM Revised 02/19

PRODUCT DESCRIPTION

Permatex® Rust Dissolver Gel is an acid based thixotropic liquid for dissolving rust on iron and steel surfaces. Product is brushed on and later washed off with water. Contains no ozone depleting compounds.

PRODUCT BENEFITS


- Will not drip or run
- Eliminates scraping
- Washes off with water
- Ideal for preparing surfaces prior to painting

TYPICAL APPLICATIONS

- Dissolves rust from ferrous metals and ferrous alloys
- Removes rust from machinery, tools, boats, pipe, fencing, drums, automobiles, trucks, motorcycles, and tractors

DIRECTIONS FOR USE

1. Wear rubber gloves when using. Be sure that the rusted surface is as free as possible of dirt, oil, grease, and loose debris.
2. Brush Rust Dissolver Gel on liberally and work into pitted areas.
3. Leave on surface for 5-10 minutes. Wipe off painted surfaces immediately.
4. Wash or rise off with fresh water.
5. Repeat applications for heavily rusted surfaces and allow product to remain on surface longer if necessary.
6. Limit applications to five minutes for chrome or plated surfaces.

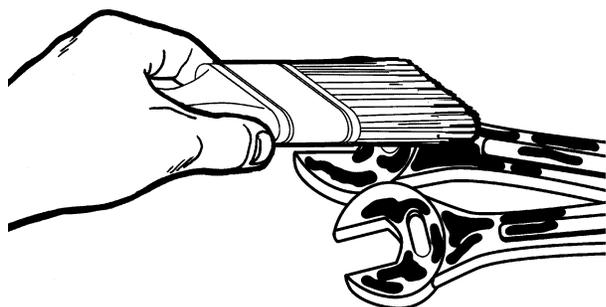

PROPERTIES OF MATERIAL

	Typical Value
Chemical Type	Phosphoric acid
Appearance	Pink
Odor	Bouquet
Specific Gravity	1.2
Viscosity	Gel
Flash Point °C (°F)	None

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
81756	8 fl. oz. bottle

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° to 28°C (46° to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.**

NOT FOR PRODUCT SPECIFICATIONS.
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.
PERMATEX, INC., 6875 PARKLAND BOULEVARD, SOLON, OH 44139 PHONE - (1-87PERMATEX)